

Professional Installation Guide for the One Wireless™ Series WCX Series XYR 6000 Valve Position Sensor

ISSUE 2
50042284

This document and the information contained herein are confidential to and the property of Honeywell, Inc. and are made available only to Honeywell employees for the sole purpose of conducting Honeywell's business. This document, and any copy thereof, and the information contained herein shall be maintained in strictest confidence; shall not be copied in whole or in part except as authorized by the employee's manager; and shall not be disclosed or distributed (a) to persons who are not Honeywell employees, or (b) to Honeywell employees for whom such information is not necessary in connection with their assigned responsibilities. Upon request, or when the employee in possession of this document no longer has need for this document for the authorized Honeywell purpose, this document and any copies thereof shall be returned to the employee's manager. There shall be no exceptions to the terms and conditions set forth herein except as authorized in writing by the responsible Honeywell Vice President.

The latest copy of this installation guide and other documentation associated to the WCX Series XYR 6000 Wireless Valve Position Sensor is available at:

<http://hpsweb.honeywell.com/Cultures/en-US/Products/Wireless/xyr6000wireless/XYR6000ValvePositioner/default.htm>

WARNING

PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

TABLE OF CONTENTS

TABLE OF CONTENTS	II
LIST OF FIGURES	IV
LIST OF TABLES	4
1 DESIGNATION, SCOPE AND PREFACE	1
1.1 DESIGNATION	1
1.2 SCOPE	1
1.3 PREFACE.....	1
1.4 SITE SURVEY.....	1
1.5 ABBREVIATIONS & DEFINITIONS.....	2
2 FEDERAL COMMUNICATION COMMISSION (FCC).....	3
2.1 FCC COMPLIANCE STATEMENTS.....	3
3 INDUSTRY CANADA (IC).....	3
3.1 IC COMPLIANCE STATEMENTS.....	3
4 RF SAFETY STATEMENT:.....	3
5 FCC AND INDUSTRY CANADA (IC) IDENTIFICATION NUMBERS:	4
5.1 DSSS RADIOS	4
6 INTENDED COUNTRY USAGE.....	5
6.1 NORTH AMERICA.....	5
6.2 ASIA PACIFIC.....	5
6.3 EUROPEAN UNION	5
7 WCX SERIES XYR 6000 VALVE POSITION SENSORS GENERAL DESCRIPTION.....	6
7.1 INTENDED USE	6
7.2 WCX SERIES XYR 6000 VALVE POSITION SENSOR DIAGRAMS	6
8 PRODUCT SPECIFICATIONS.....	7
8.1 DIRECT SEQUENCE SPREAD SPECTRUM (DSSS) RADIO, 2.4 GHz	7
8.2 WCX SERIES XYR 6000 VALVE POSITION SENSOR USER ENVIRONMENT.....	8
8.3 WCX INSTRUMENT POWER SPECIFICATIONS	8
8.4 WEIGHT	8
8.5 DIMENSIONS.....	9
9 EQUIVALENT ISOTROPICALLY RADIATED POWER (EIRP)	10
10 EIRP LIMITS	10
11 SETTING TX POWER.....	13
12 AGENCY LABEL INFORMATION	14
12.1 EXTERNAL FCC/IC LABELS.....	14
12.2 INTERNAL FCC/IC LABEL	14
13 RF SAFETY, MAXIMUM PERMISSIBLE EXPOSURE (MPE) STATEMENT	15

14	AGENCY COMPLIANCE.....	16
14.1	RADIO AND EMC CERTIFICATIONS.....	16
14.1.1	Federal Communication Commission (FCC)	16
14.1.2	Industry Canada (IC).....	16
14.1.3	European Telecommunications Standards Institute (ETSI)	16
14.1.4	Australian communications and media authority (ACMA)	16
14.1.5	Thailand National Telecommunications Commission (TNTC).....	16
14.2	PRODUCT SAFETY AGENCY CERTIFICATIONS	17
14.2.1	Canadian Standards Association (CSA).....	17
14.2.2	European ATEX Certification (ATEX).....	17
14.3	EUROPEAN UNION CERTIFICATION (CE-MARK).....	18
15	REFERENCE DOCUMENTS	18

LIST OF FIGURES

Figure 1 – WCX Series XYR 6000 Valve Position Sensor.....	6
Figure 2 – Dimensions of the WCX Series XYR 6000Valve Position Sensor.....	9

LIST OF TABLES

Table 1 –Table of Abbreviations and Definitions2

Table 2 –Specifications of DSSS Radio Module in XYR 6000 valve position sensor - WCX Series..... 7

Table 3 –User Environment Specifications for XYR 6000 valve position sensor - WCX Series 8

Table 4 – Maximum EIRP Limits for DSSS Radios..... 10

Table 5 – DSSS Transmit Power Settings for the antennas and cable lengths specified above for FCC, IC, ETSI, ACMA and TNTC approvals 12

1 DESIGNATION, SCOPE AND PREFACE

1.1 Designation

This document is valid for all OneWireless™ XYR6000 WCX Series transmitters, which feature a DSSS transmitter.

1.2 Scope

This document outlines professional installation requirements for the Honeywell WCX Series valve position sensor for the Honeywell OneWireless™ Network. Professional installation is required to comply with certification agency and legal requirements. This document must be adhered to for all installations of the Honeywell OneWireless™ WCX Series sensors.

1.3 Preface

This manual covers professional installation of the Honeywell OneWireless™ WCX Series valve position sensors. See the Getting Started with Honeywell OneWireless™, Honeywell OneWireless™ Planning Guide and Honeywell OneWireless™ XYR6000 WCX Series Valve Position Sensor User's Guides for general information on overall system implementation, configuration, and management of these devices.

Since these devices may require that the Transmit (TX) power limit settings for the higher gain antennas be manually adjusted, the WCX Series sensor is classified by the FCC as a device that must be professionally installed. To be in compliance with FCC requirements, the radio must be installed with one of approved antennas listed in this document.

1.4 Site Survey

It is assumed for the purposes of this document that a site survey has been performed and that the antenna types, cable lengths and lightning surge arrestors were appropriately selected per the results of that survey. Any changes to these items as a result of the actual installation of the WCX Series XYR 6000 valve position sensors into the site may require that the TX power setting of the radio board needs to be adjusted from the factory setting in order to maintain agency approvals. See Sections 10 and 11 for more information.

1.5 Abbreviations & Definitions

The term **WCX Series valve position sensor** will be used to describe the composite unit which includes the Honeywell DSSS RF module and all subassemblies housed within the XYR 6000 WCX Series valve position sensor enclosure.

Table 1 –Table of Abbreviations and Definitions

ACMA	Australian Communications and Media Authority
AD	Authentication Device
ATEX	Potentially Explosive Atmospheres Directive
AWG	American Wire Gauge
Co-located	Two or more radios transmitting simultaneously and with less than 20cm of separation distance.
COTS	Commercial Off-The-Shelf
CSA	Canadian Standards Association
DCS	Distributed Control System
DSSS	Direct Sequence Spread Spectrum
EMC	Electromagnetic Compatibility
ETSI	European Telecommunications Standards Institute
EU	European Union
FCC	Federal Communications Committee
FHSS	Frequency-Hopping Spread Spectrum
FSK	Frequency Shift Keying
GFSK	Gaussian Frequency Shift Keying
HLAI	High Level Analog Input
IC	Industry Canada
IEEE	Institute of Electrical and Electronics Engineers
IR	Infrared
IrDA	Infrared Data Association
LUI	Local User Interface
MPE	Maximum Permissible Exposure
MSG	Honeywell Model Selection Guide
MTBF	Mean Time Between Failures
NA	North America – United States of America and Canada
NEMA	National Electrical Manufacturers Association
PCB	Printed Circuit Board
PCI	Peripheral Components Interconnect
OQPSK	Offset Quadrature Phase-Shift Keying
RAM	Random Access Memory
RJ-45	Registered Jack-45
RPN	Reverse Polarity N-type
SQA	Supplier Quality Assurance
TNTC	Thailand National Telecommunications Commission
TX	Transmit
Wi-Fi	Wireless Local Area Network based on IEEE 802.11 Specifications
WNSIA	Wireless Network for Secure Industrial Application

2 FEDERAL COMMUNICATION COMMISSION (FCC)

2.1 FCC Compliance Statements

- This device complies with Part 15 of FCC Rules and Regulations. Operation is subject to the following two conditions: (1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.
- This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radiofrequency energy and, if not installed and used in accordance with these instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
- Intentional or unintentional changes or modifications must not be made to the WCX Series sensor unless under the express consent of the party responsible for compliance. Any such modifications could void the user's authority to operate the equipment and will void the manufacturer's warranty.

3 INDUSTRY CANADA (IC)

3.1 IC Compliance Statements

- To reduce potential radio interference to other users, the antenna type and its gain should be chosen so that the equivalent isotropic radiated power (EIRP) is not more than that permitted for successful communication.
- Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
- This Class A digital apparatus has been tested and found to comply with Canadian ICES-003.
- French: Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

4 RF Safety Statement:

To comply with FCC's and Industry Canada's RF exposure requirements, the following antenna installation and device operating configurations must be satisfied.

- Remote point-to-multi-point antenna(s) for this unit must be fixed and mounted on outdoor permanent structures with a separation distance between the antenna(s) of greater than 20cm and a separation distance of at least 20 cm [7.87 in] from all persons.
- Furthermore, when using integral antenna(s) the WCX Series sensor unit must not be co-located with any other antenna or transmitter device and have a separation distance of at least 20 cm [7.87 in] from all persons.

5 FCC and Industry Canada (IC) Identification Numbers:

5.1 DSSS Radios

- Honeywell XYR 6000 WCX Series valve position sensor DSSS radio module identification
 - Honeywell identification for intrinsically safe RF modules: **50025034-001**
- Honeywell XYR 6000 WCX Series valve position sensor DSSS Radio Limited modular Approval
 - Federal Communication Commission identification for intrinsically safe RF modules: **S5750025034**
 - Industry Canada identification for intrinsically safe RF modules: **573I-50025034**

This information is shown on the label attached to each RF Module.

6 INTENDED COUNTRY USAGE

6.1 NORTH AMERICA

Country	ISO 3166 2 letter code
UNITED STATES	US
CANADA	CA

6.2 ASIA PACIFIC

Country	ISO 3166 2 letter code
AUSTRALIA	AU
THAILAND	TH
NEW ZEALAND	NZ

6.3 EUROPEAN UNION

Country	ISO 3166 2 letter code	Country	ISO 3166 2 letter code
Austria	AT	Latvia	LV
Belgium	BE	Liechtenstein	LI
Bulgaria	BG	Lithuania	LT
Cyprus	CY	Malta	MT
Czech Republic	CZ	Netherlands	NL
Denmark	DK	Norway	NO
Estonia	EE	Poland	PL
Finland	FI	Portugal	PT
France	FR	Romania	RO
Germany	DE	Slovakia	SK
Greece	GR	Slovenia	SI
Hungary	HU	Spain	ES
Iceland	IS	Sweden	SE
Ireland	IE	Switzerland	CH
Italy	IT	United Kingdom	GB

7 WCX SERIES XYR 6000 VALVE POSITION SENSORS GENERAL DESCRIPTION


7.1 Intended Use

The WCX Transmitter is a key component of the Honeywell *Wireless Network for Secure Industrial Application* (WNSIA). These transmitters are available for various sensor types including digital inputs, temperature, high level analog inputs, pressure and corrosion. The WCX transmitter uses a low-powered FHSS or DSSS 2.4 GHz radio to communicate with Multinode and Gateway devices that are connected to a wired DCS network.

7.2 WCX Series XYR 6000 Valve Position Sensor Diagrams

Figure 1 shows unit-level drawings of the WCX Transmitter antenna options.

Figure 1. WCX Series XYR 6000 Valve Position Sensor

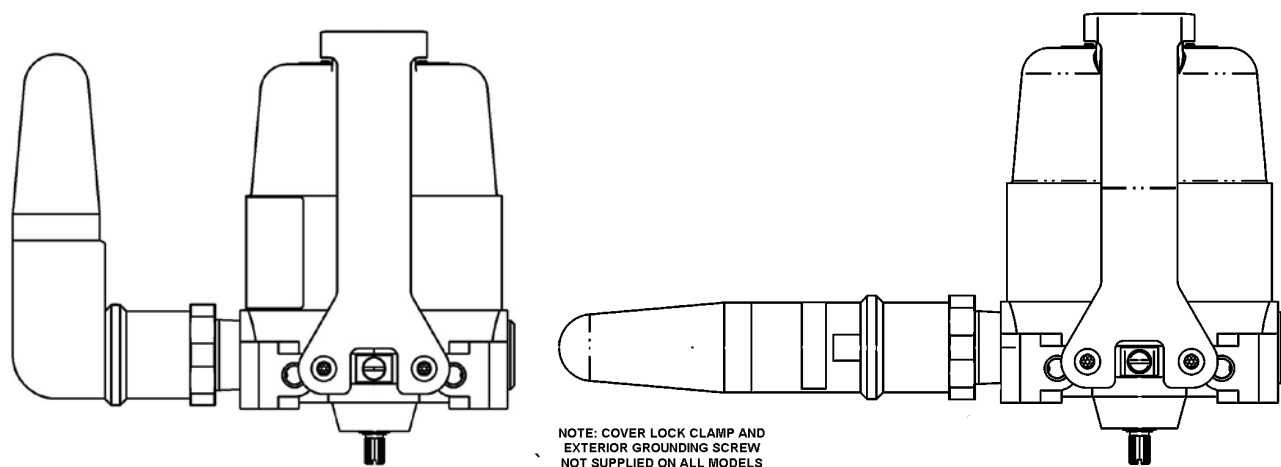

The WCX transmitter is available with either a 2 dBi straight or 2 dBi right angle integral antennas. The antennas are not replaceable or changeable in the field.

8 PRODUCT SPECIFICATIONS

8.1 Direct Sequence Spread Spectrum (DSSS) Radio, 2.4 GHz

WARNING

The WCX Transmitter must be professionally installed in accordance with the requirements specified in this document. See Section 10, for professional installation maximum TX power setting requirements. Only the specified TX power settings, antenna types and gains and cable lengths (attenuation) as outlined in this document are valid for WCX Series position sensor installations.

Table 2 –Specifications of DSSS Radio Module in XYR 6000 valve position sensor - WCX Series

Item	Specification
Wireless standard	FCC 15.247 / IEEE 802.15.4 Direct Sequence Spread Spectrum (DSSS), 2.4 GHz
Data rates and modulation	Data rate: 250 kbps Modulation: Offset Quadrature Phase-Shift Keying (OQPSK – DSSS)
Frequency band	2,405 MHz to 2,475 MHz
Module transmit power	Maximum: 20 dBm (Maximum transmit power will vary by channel)
Receive sensitivity (typ.)	-100 dBm

8.2 WCX Series XYR 6000 Valve Position Sensor User Environment

Table 3. User environment specifications for XYR 6000 valve position sensor - WCX Series

Item	Specification
Operating temperature	-40 °C to 55 °C [-40 °F to 131°F]
Storage temperature	-40 °C to 85 °C [-40 °F to 185°F]
Operating humidity	0 %RH to 100 %RH

8.3 WCX Instrument Power Specifications


The WCX Series sensors operate from two (2) C-size 3.6 V Lithium batteries. These are joined in series to produce a maximum voltage of 7.6 Vdc.

8.4 Weight

The weight of the complete WCX Series sensor units is 2.04 kg [4.5 lb] maximum for Series WCX1X1, and is 5.03 kg [11.1 lb] maximum for Series WCX1X2. This weight includes integral antenna.

8.5 Dimensions

Figure 2. Dimensions of the WCX Series XYR 6000 valve position sensor

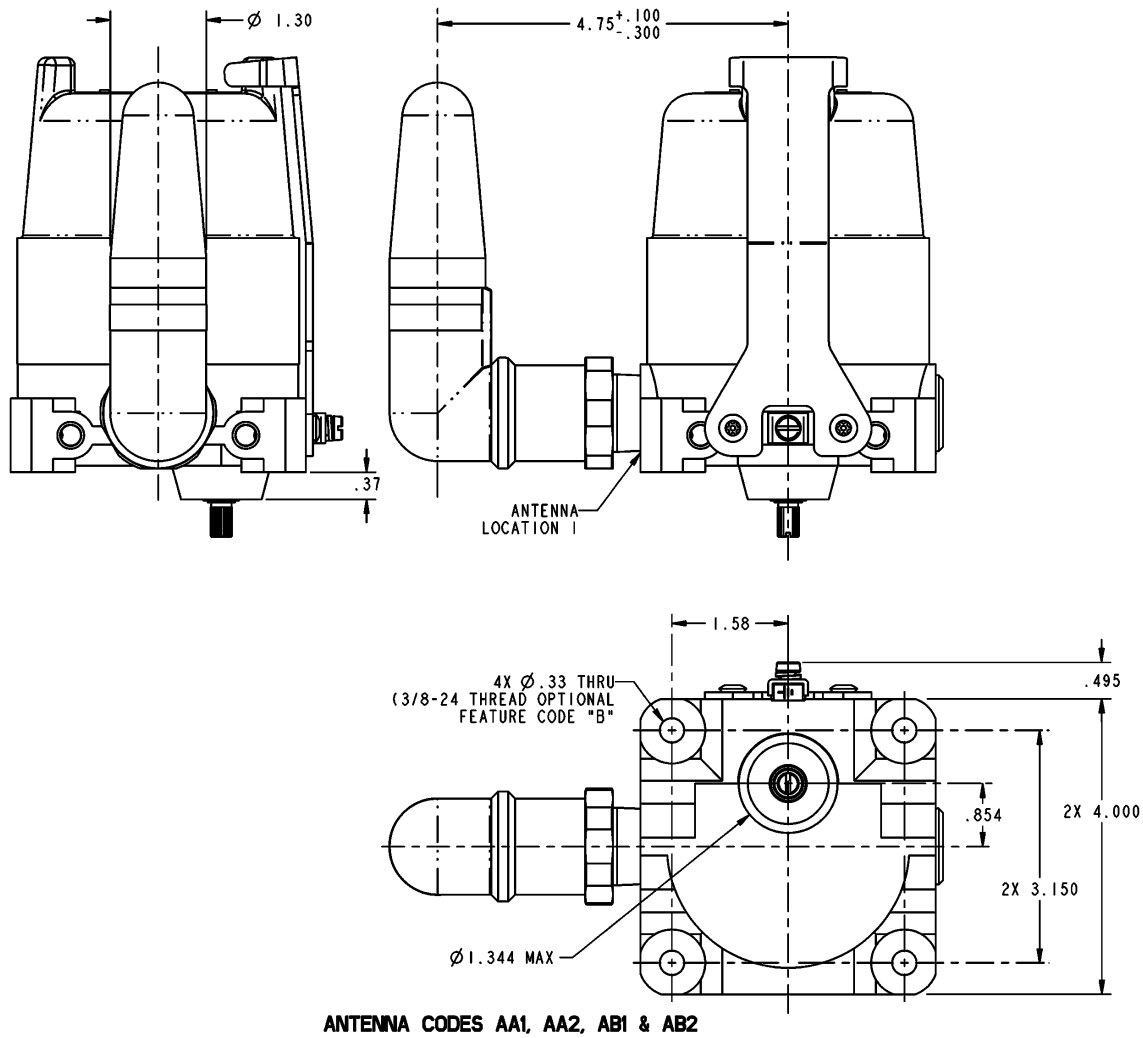

9 Equivalent Isotropically Radiated Power (EIRP)

In radio communication systems, Equivalent Isotropically Radiated Power (EIRP) or, alternatively, Effective Isotropic Radiated Power, is the amount of power that would have to be emitted by an isotropic antenna (that evenly distributes power in all directions and is a theoretical construct) to produce the peak power density observed in the direction of maximum antenna gain. EIRP can take into account the losses in transmission line and connectors and includes the gain of the antenna. The EIRP is often stated in terms of decibels over a reference power level that would be the power emitted by an isotropic radiator with an equivalent signal strength. The EIRP allows making comparisons between different emitters regardless of type, size or form. From the EIRP, and with knowledge of a real antenna's gain, it is possible to calculate real power and field strength values.

$$\text{EIRP(dBm)} = \text{Radio TX Power (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain(dBi)}$$

Antenna gain is expressed relative to a (theoretical) isotropic reference antenna (dBi).

10 EIRP LIMITS

Table 4. Maximum EIRP Limits for DSSS Radios

Antenna type	Radio usage/application		Freq. (GHz)	Max. ant. gain (dBi)	Min. cable length (m)	Min. cable loss (dB)	Agency/country	Max. radio output power (dBm)	Max. EIRP (dBm)
-2 dBi Omni	Point to multi-point	Integral	2.4	-2	0	0	FCC, IC	20	18
							ETSI, ACMA, TNTC	14	12
							France 2400-2454 MHz	14	12
							France 2454-2482.5 MHz	Do not use ³	---
4 dBi Omni	Point to multi-point	Integral	2.4	4	0	0	FCC, IC	20	24
							ETSI, ACMA, TNTC	8	12
							France 2400-2454 MHz	8	12
							France 2454-2482.5 MHz	Do not use ³	---
8 dBi Omni	Point to multi-point	Remote	2.4	8	1	1	FCC, IC	18	25
							ETSI, ACMA, TNTC	5	12
							France 2400-2454 MHz	5	12
							France 2454-2482.5 MHz	Do not use ³	---
14 dBi Directional	Point to multi-point	Remote	2.4	14	1	1	FCC, IC	12	25
							ETSI, ACMA, TNTC	-2	11
							France 2400-2454 MHz	-2	11
							France 2454-2482.5 MHz	Do not use ³	---

Notes for Table 4:

1. The values in the above tables have been determined through agency certification testing.
2. The following shall apply for antenna type, frequency range, application/usage and agency/country compliance:
 - Antenna gains above the maximum values shown shall not be used.
 - Cable length/loss below the minimum values shown shall not be used.
 - Maximum overall radio output power shown shall not be exceeded.
 - Maximum EIRP values shown above shall not be exceeded.
3. **France** restricts outdoor use to 10mW (10 dBm) EIRP in the frequency range of 2,454 MHz to 2,483.5 MHz. Installations in France must limit EIRP to 10 dBm for operating modes utilizing frequencies in the range of 2,454 MHz to 2,483.5MHz. For this reason, Honeywell does not recommend configuring frequency hopping modes that use this frequency range. **For installations in France, use only the following OneWireless™ Frequency Hopping (FH) Mode Selections: EU Channel #1, EU Channel #7, NA/EU Guard Bands and NA/EU Channel 3 (FH Mode selections #4, 5, 8 and 10).**
4. Industry Canada Compliance Statement: This device has been designed to operate with the antenna types listed in this document, and having a maximum gain of 14 dBi. Antenna types not included in this list or having a gain greater than 14 dBi are strictly prohibited for use with this device. The required antenna impedance is 50 Ohm.

Table 5. DSSS transmit power settings for the antennas and cable lengths specified above for FCC, IC, ETSI, ACMA and Tntc approvals

Description	Antenna option nomenclature	TX power setting for ETSI/ACMA/Tntc ³ (dBm)	TX power setting for FCC/IC ³ (dBm)
2 dBi 90° elbow integral antenna	V1 or V2	14	16
2 dBi straight integral antenna	S1 or S2	14	16

Notes for Table 5:

1. The model number of any instrument may be found on the identification name plate located on the outside of the Wcx Series sensor.
2. TX power is set by the Honeywell factory producing the Wcx Series sensor to the values shown in the above tables. These factory values are determined by the customer's model number selections in Table III for antenna type, cables and the lightning suppressor. If the cable lengths, antenna type or the use of a lightning surge arrestor are changed in the field away from the model number listed on the instrument, then the TX power setting should likewise be changed per the tables above to match the new antenna/cable/arrestor selections.
3. The TX power setting values represent the power produced by the radio circuit within the RF module. These TX power setting values do not include antenna gains nor do they include losses caused by cables, connectors and lightning arrestors. When these external gains and losses are included, using the TX power values ensures that the EIRP will not exceed the maximum limits as given in Table 4.

11 Setting TX Power

WARNING

The WCX Series valve position sensor must be professionally installed in accordance with the requirements specified in this document. Only the specified power settings, antenna types and gains and cable lengths (attenuation) as outlined in this document are valid for WCX Series valve position sensor installations.

TX power setting is accomplished with the authentication device when a special application (app) is installed. This app is considered to be Honeywell sensitive material and is made available only to the qualified professional installer.

When this app is installed in the AD, the WCX Series sensor TX power setting, normally a read-only parameter, becomes a read/write parameter.

Using the virtual keyboard in the device local configuration AD routine to manipulate the local user interface (LUI), navigate to the **TX_POWER** display in the **RADIO** setup group. The WCX Series sensor as shipped from the factory should show a TX power value consistent with those given in 0.

The TX power adjustment feature is provided for professional installers to adjust the WCX Series sensor TX power to match the specific selection of antenna and cables at the installation site and keep the total TX power under the regulatory thresholds.

12 Agency Label Information

The following information shall be clearly and permanently labeled on the WCX Series valve position sensor unit:

12.1 External FCC/IC Labels

50039279-001

**THIS DEVICE COMPLIES WITH PART 15 OF
THE FCC RULES. OPERATION IS SUBJECT
TO THE FOLLOWING TWO CONDITIONS:
(1) THIS DEVICE MAY NOT CAUSE HARMFUL
INTERFERENCE AND (2) THIS DEVICE MUST
ACCEPT ANY INTERFERENCE RECEIVED,
INCLUDING INTERFERENCE THAT MAY CAUSE
UNDESIRABLE OPERATION.**

**CONTAINS: FCC ID: S5750025034
CONTAINS: 50025034, IC: 5731-50025034**

12.2 Internal FCC/IC Label

50021957-003

RF MOD 50025034-001
FCC ID: S5750025034
IC: 5731-50025034

13 RF Safety, Maximum Permissible Exposure (MPE) statement

To comply with FCC's and Industry Canada's RF exposure requirements, the following antenna installation and device operating configurations must be satisfied:

Remote antenna(s) for this unit must be fixed and mounted on outdoor permanent structures with a separation distance between the antenna(s) of at least 20 cm and a separation distance of at least 20 cm from all persons.

When using integral antenna(s) the WCX Series valve position sensor unit must not be co-located with any other antenna or transmitter device and have a separation distance of at least 20 cm [7.87 in] from all persons.

14 Agency Compliance

14.1 Radio and EMC Certifications

14.1.1 Federal Communication Commission (FCC)

- Specification: FCC Part 15.247 Subpart B for unintentional radiators
- Specification: FCC Part 15.247 Subpart C for intentional radiators

14.1.2 Industry Canada (IC)

- Method: RSS-210, Issue 7
- RSS-Gen, Issue 2
- ICES-003, Issue 4

14.1.3 European Telecommunications Standards Institute (ETSI)

- Emissions Specification and Method: EN 300 328 V1.7.1
- Emissions Spec and Method: EN 301 893 V1.3.1
- Immunity Specification: EN 301 489-17 V2.1.1
- Immunity Method: EN 301 489-1 V1.8.1
- Product Standard: EN61326-1, 2006 (Industrial Locations)

14.1.4 Australian communications and media authority (ACMA)

- Specification: AS NZS 4771-2000

14.1.5 Thailand National Telecommunications Commission (TNTC)

- Specification: เรื่อง เครื่องวิทยุคมนาคมและสถานีวิทยุคมนาคมที่ได้รับยกเว้นไม่ต้องได้รับใบอนุญาต (Specification for non-licensed Radio and Radio Station Telecommunications)

14.2 Product Safety Agency Certifications**14.2.1 Canadian Standards Association (CSA)**

CAN/CSA-C22.2 No. 0-M91	-	General Requirements – Canadian Electrical Code, Part II
C22.2 No. 25-1966	-	Enclosures for Use in Class II, Groups E, F and G Hazardous Locations
C22.2 No. 30-M1986	-	Explosion-Proof Enclosures for Use in Class I Hazardous Locations
CAN/CSA-C22.2 No. 157-92	-	Intrinsically Safe and Non-Incendive Equipment for Use in Hazardous Locations
CAN/CSA-C22.2 No. 60079-0:07	-	Electrical apparatus for explosive gas atmospheres - Part 0: General requirements
CAN/CSA-C22.2 No. 60079-1:07	-	Electrical apparatus for explosive gas atmospheres - Part 1: Flameproof enclosures "d"
CAN/CSA-E60079-11:02	-	Electrical apparatus for explosive gas atmospheres - Part 11: Intrinsic Safety "i"
CAN/CSA-C22.2 No. 60529:05	-	Degrees of protection provided by enclosures (IP Code)
CAN/CSA-E61241-1-1:02	-	Electrical apparatus for use in the presence of combustible dust – Part 1-1: Electrical Apparatus protected by enclosures and surface temperature limitation – Specification for apparatus
UL 913 (7 th Ed.)	-	Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II and III, Division 1, Hazardous Locations
UL 1203 (4 th Ed.)	-	Explosion-Proof and Dust-Ignition-Proof Electrical Equipment for Use in Hazardous (Classified) Locations
ANSI/UL 60079-0:05	-	Electrical Apparatus for Explosive Gas Atmospheres - Part 0: General Requirements
ANSI/UL 60079-1:05	-	Electrical Apparatus for Explosive Gas Atmospheres - Part 1: Flameproof Enclosures "d"
ANSI/UL 60079-11:07	-	Electrical apparatus for Explosive Gas Atmospheres - Part 11: Intrinsic Safety "i"
ANSI/IEC 60529:2004	-	Degrees of Protection Provided by Enclosures (IP Code)
ANSI/ISA-61241-0 (12.10.02)-2006	-	Electrical Apparatus for Use in Zone 20, Zone 21 and Zone 22 Hazardous (Classified) Locations – General Requirements
ISA-61241-1 (12.10.03)-2006	-	Electrical Apparatus for Use in Zone 21 and Zone 22 Hazardous (Classified) Locations – Protection by Enclosures "tD"

14.2.2 European ATEX Certification (ATEX)

EN 60079-0	-	Electrical Apparatus for Explosive Gas Atmospheres, Part 0: General Requirements
EN 60079-1	-	Electrical Apparatus for Explosive Gas Atmospheres, Part 1: Flameproof Enclosures "d"
EN 60079-15	-	Electrical Apparatus for Explosive Gas Atmospheres, Part 15: Electrical Apparatus with Type of Protection "n"
EN 50281	-	Electrical Apparatus for Use in the Presence of Combustible Dust
EN 50284	-	Special Requirements for Construction, Test and Marking of Electrical Apparatus of Equipment Group II, Category 1G

14.3 European Union Certification (CE-mark)

- Compliance with:
 - R&TTE Directive 1999/5/EC
 - EMC Directive 2004/108/EC
 - LVD Directive 2006/95/EC
 - ATEX Directive 94/9/EC

15 Reference Documents

Table 6 – Reference Documents

1	Getting Started with Honeywell OneWireless™
2	Honeywell OneWireless™ Planning Guide
3	Honeywell OneWireless WCX Series XYR 6000 Valve Position Sensor User's Manual
4	Radio Antenna: A Primer White Paper
5	Honeywell OneWireless™ System Administration Guide
6	Honeywell OneWireless™ Field Network Dictionary
7	OneWireless™ Builder Parameter Reference
8	OneWireless™ Builder User's Guide
9	OneWireless™ XYR6000 WCX Series Valve Position Sensor Selection Guides

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:

Asia Pacific	+65 6355-2828 +65 6445-3033 Fax
Europe	+44 (0) 1698 481481 +44 (0) 1698 481676 Fax
Latin America	+1-305-805-8188 +1-305-883-8257 Fax
USA/Canada	+1-800-537-6945 +1-815-235-6847 +1-815-235-6545 Fax

Sensing and Control
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422
www.honeywell.com

50042284-2-EN IL50 GLO Printed in USA
April 2010
Copyright © 2010 Honeywell International Inc. All rights reserved.

Honeywell